

Datasheet: EN 1.4404/316L – Austenite Welded Collars - Stainless Steel Alumeco ApS 15-08-2025		Internal alloy name: 1.4404 Alloy type: Acid-resistance Austenite Chemical Symbol: X2CrNiMo17-12-2 EN: EN 1.4404 AISI: 316L UNS: S31603 SS: 2348 JIS: SUS316L GB: S31603
Main usage: - Food processing industry - Petrochemical equipment - Chemical and pharmaceutical industry - Construction sector - Automotive and aerospace industry - Electronical equipment	Main properties: - Great weldability - High corrosion resistance to non-oxidising acids and chlorine-containing materials - Good formability, both cold and hot - Higher thermal expansion and lower heat conductivity compared to other carbon steels	Important norms and literature: General Standards EN 10088-1: List of stainless Steel Product standards: EN 10253-4A: Butt-welding pipe fittings - Part 4: Wrought austenitic and austenitic-ferritic (duplex) stainless steels with specific inspection requirements Tolerances: EN 10253-4A: Butt-welding pipe fittings - Part 4: Wrought austenitic and austenitic-ferritic (duplex) stainless steels with specific inspection requirements

Chemical composition in %: EN 10088-1

C	Si	Mn	P	S	Cr	Mo	Ni	Remarks	Rest
≤ 0,030	≤ 1,00	≤ 2,00	≤ 0,045	≤ 0,015*	16,5-18,5	2,0-2,5	10,0-13,0	N ≤ 0,10	Fe

* For machinability, a controlled sulfur content of 0,015%-0,030% is recommended & permitted. For weldability a controlled sulfur content of 0,008%- 0,030% is recommended & permitted. For polishability, a controlled sulfur content of 0,015% is recommended.

Mechanical properties: EN 10253-4A

Hardness* HB	Tensile properties at room temperature				Reference heat treatment conditions Solution temp. °C	Resistance to intergranular corrosion	Limit temp. °C	
	Proof strength Min. MPa		Tensile strength R _m MPa	Elongation Min. A%				
	R _{p0,2}	R _{p1,0}		l				t
Max. 215	190	225	490 – 700	40	30	1020 – 1120	Yes	400


* Information values only;

Physical properties:

Density g/cm ³	Electrical resistivity Ω mm ² / m	Thermal conductivity W/m K	Thermal expansion (μm m ⁻¹ K ⁻¹)	Specific heat (J kg ⁻¹ K ⁻¹)	E - modulus (N / mm ²)	Magnetizable	PREN (Min.)
8,0	0,75	15	16,0	500	200.000	No	16,5

Product Overview:

Material Nr.	DN	Diameter (mm)		Thickness F (mm)	Height H5 (mm)	Weight (kg)
		A	D			
1361865	10	17,2	40	2,00	6	0,02
1332023	15	21,3	45	2,00	6	0,02
1332029	20	26,9	58	2,00	8	0,04
1332040	25	33,7	68	2,00	9	0,05
1332052	32	42,4	78	2,00	10	0,06
1332054	40	48,3	88	2,00	10	0,08
1332056	50	60,3	102	2,00	12	0,11
1332057	65	76,1	122	2,00	12	0,14
1332058	80	88,9	138	2,00	13	0,17
1332009	100	114,3	158	2,00	14	0,20
1332012	125	139,7	188	2,00	15	0,27
1332020	150	168,3	212	2,00	18	0,31
1332024	200	219,1	268	2,00	22	0,47
1358412	250	273,0	320	3,00	23	0,86
1332038	300	323,9	370	3,00	19	0,89
1332043	350	355,6	430	3,00	21	1,53
1332051	400	406,4	480	3,00	21	1,72

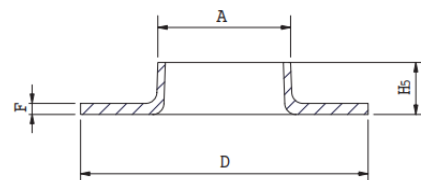

Tolerances for welded stainless steel collars for EN 1.4404:

Tolerances on outside diameter

The relevant outside diameters ($D-D_1$) shall be measured at the welding ends of the fittings.

The tolerance is as follows:

- $\pm 1\%$ or $\pm 0,5$ mm, whichever is the greater, but maximum ± 5 mm.

* Values are referred from Section 11.2.1 of EN 10253-4:2025

Tolerances on roundness

At the welding ends:

- $D \leq 406,4$ is included in the diameter tolerance
- $D > 406,4$ and $D/T \leq 100$, then $O_v \leq 2\%$

For fittings with a D/T ratio > 100 the values for out-of-roundness shall be agreed at the time of enquiry and order.

On the body for elbows and return bends: $\leq 4\%$.

The out of roundness shall be calculated as follows:

- $O_v = 100 * (D_{\max} - D_{\min}) / D$ (in %)

* Values are referred from Section 11.2.2 of EN 10253-4:2025

Tolerances on wall thickness

NOTE: The minus tolerances shown in below table also applies to the body of the fitting, but there is no plus tolerance for the body of the fitting defined.

Diameter D (mm)	Wall thickness T (mm)	Wall thickness tolerance	
		minus	plus
≤ 610	all	-12,5 %	+ 20 %
	seamless	-12,5 %	+ 20 %
> 610	welded		
	≤ 10	- 0,35 mm	+ 20 %
	> 10	- 0,5 mm	

* Values are referred from Section 11.2.3 of EN 10253-4:2025